



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 7 : G01N 17/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/54027 (43) International Publication Date: 14 September 2000 (14.09.00)</p>
<p>(21) International Application Number: PCT/GB00/00828 (22) International Filing Date: 7 March 2000 (07.03.00) (30) Priority Data: 9905274.8 8 March 1999 (08.03.99) GB (71)(72) Applicant and Inventor: SUTTON, John [GB/GB]; The Willows, Mid Holmwood Lane, Dorking, Surrey RH5 4HA (GB). (74) Agent: BOULT WADE TENNANT; Verulam Gardens, 70 Gray's Inn Road, London WC1X 8BT (GB).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>
<p>(54) Title: PROBE DEVICE FOR APPARATUS FOR MONITORING CORROSION OF A MATERIAL</p>		
<p>(57) Abstract</p> <p>A probe is disclosed which is suitable for use with an apparatus for monitoring the corrosion of a material by accurately measuring changes in the resistance of an exposed element (101) in relation to a reference element (103). <u>The two elements are electrically connected in series via a bridge (131).</u> The elements are formed from the same piece of material divided along an elongate slot (167) and are proximate to one another so that the temperature difference between them is kept to a minimum. This prevents false indications of corrosion by ensuring that the temperature coefficient of the resistivities is the same in both elements. The reference element (103) is covered with a corrosion-resistant layer (113). This layer (113) is preferably as thin as possible and also a good thermal conductor to further ensure equal temperature of the reference (103) and exposed (101) elements.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

PROBE DEVICE FOR APPARATUS FOR MONITORING
CORROSION OF A MATERIAL

5 Field of the Invention

 The present invention relates to electrical resistance corrosion monitors for detecting loss of material due to corrosion and/or erosion caused by the interaction of that material with its environment.

10 More specifically, the present invention relates to probe devices for electrical corrosion monitors.

Discussion of the Prior Art

 Corrosion monitors are commonly used for

15 detecting and monitoring loss of material due to corrosion and/or erosion caused by the interaction between the material and the environment in contact with the material. Corrosion monitors generally detect the loss of material by an electrical

20 resistance method. Such corrosion monitors typically comprise a probe device that has an element comprising a material that exhibits similar erosion/corrosion susceptibility as the material to be monitored, for example the metal material of the interior surface of

25 steel pipes used in gas and oil pipelines. The element is situated in the same environment, e.g. the pipeline fluid, that is in contact with the metal material, e.g. steel pipe. The resistance of the element increases due to reduction of the cross-

30 sectional area of the element caused by the corrosion and/or erosion of the element by the environment in

- 2 -

which the element and metal material are situated.
The increase in resistance of the element provides an indication of the corrosion and erosion of the metal material.

5 Resistance of the element of the metal material
in corrosion monitors is commonly monitored by
supplying a current through the probe device holding
the exposed element and a reference element, where the
reference element is protected from and inaccessible
10 by the fluid and in series with the exposed element.
The voltages across both elements are measured and the
resistance ratio of the exposed element resistance to
the reference element resistance is then calculated.
The change of resistance ratio is representative of
15 the loss of material of the exposed element. Of
course, the sensitivity of the corrosion monitor is
dependent on both the current supplied to the elements
and the resistance of the elements. Accordingly, the
larger the current and/or the larger the resistance
20 values of the elements, the greater the sensitivity of
the corrosion monitor.

 However, the sensitivity of the corrosion monitor
is limited by various factors. For instance, the
sensitivity of the corrosion monitor is dependent on
25 the maximum current and the maximum resistance of the
element. The environment in which the element is
situated is often potentially explosive, such as in
gas and oil pipelines. The maximum current in such
environments is limited to intrinsic safety
30 requirements. Typically the maximum current
permissible is less than 100 mA in such environments

- 3 -

and the typical resistance of the element is usually in the range of 1 to 10m Ω . Higher element resistances, thus higher sensitivities, are attainable with elements having smaller cross-sectional areas, e.g. less than 0.5mm thick, although, the useful life of such an exposed element is reduced. Accordingly, the sensitivity of corrosion monitors is limited by the relatively small measured resistive voltages which are usually in the range of 10 to 100 μ V.

Disturbances such as noise and dc offsets occurring in the electronic circuitry of the corrosion monitor and thermoelectric voltages and electromagnetic noise occurring in the leads between the electronic circuitry and the probe make accurate high resolution measurements of such small voltages difficult.

Additionally, changes in temperature in the environment in which the element is situated changes the resistance of the element. For example, the resistance of steel may change by 0.4% per $^{\circ}$ C.

Accordingly, in electrical resistance corrosion monitors configured with an exposed element and a reference element, changes in fluid temperatures significantly limits the accuracy and sensitivity of the monitor if the temperature of the exposed element and reference element differ.

In the prior art designs, different values of temperature coefficients of resistivities of the elements limits the performance of the corrosion monitor. Even if the temperature coefficient of resistivity values differ as little as 10ppm $^{\circ}$ C $^{-1}$, a change in probe temperature of 50 $^{\circ}$ C causes a change in

- 4 -

the resistance ratio by 500ppm, giving a false indication of corrosion. Hence, the accuracy and sensitivity of such prior art electrical resistance corrosion monitors is limited to detect corrosion in
5 days or months. Such devices are not effective for many corrosion management applications such as in controlling and detecting the addition of corrosion inhibitors introduced in pipeline fluids.

Attempts have been made to increase the
10 sensitivity and improve the resolution of measurements to the changes in the resistance of the element due to corrosion and/or erosion of the element in electrical resistance corrosion monitors. However, the
15 sensitivity in such corrosion monitors is typically limited to several days before corrosion can be measured. For example, European Patent Application No. 84303370.5 discloses a flush mounting electrical resistance corrosion probe that has a sample element and a reference element where the reference element is
20 shielded from the corrosive fluid environment by the sample element and an insulating material plug of the probe. Although the reference element is responsive to the temperature conditions of the environment in such a configured probe, the reference element and the
25 sample element may not be at substantially identical temperatures during corrosion monitoring. Since the reference element is protected from the fluid environment by the sample element and electrically insulating material of the plug that has low thermal
30 conductivity, the temperature and resistance of the reference element changes more slowly than the

- 5 -

temperature of the sample element. Even slow temperature changes producing small temperature differences between the sample element and the reference element may produce significant changes in the resistance ratio. Additionally, the elements are formed in a manner that the values of temperature coefficients of resistivity for each element may differ. Consequently, these factors limit the sensitivity of such a configured probe and can yield spurious indications of corrosion when the temperature of the fluid environment is changing or even when the temperature of the fluid is constant as the temperature in the probe may differ from the fluid environment temperature.

Therefore, there is a need for an electrical resistance corrosion monitor with a greater sensitivity to accurately measure at a higher resolution, for example in minutes or hours, the corrosion and/or erosion of a material in a corrosive/erosive environment where the environment temperature may be fluctuating.

Summary of the Invention

An object of the present invention is to provide an apparatus with improved sensitivity for monitoring change in the thickness of an element.

The present invention provides a probe device for use in an apparatus for monitoring changes in the resistance of an element caused by a fluid at the surface thereof, said probe device comprising a first element having a surface that is directly accessible.

- 6 -

by a fluid, a second element electrically connected in series with said first element and forming therewith a path for the passage of electrical current to flow therethrough, wherein said first element and said second element are formed from the same piece of material, said piece of material being divided along an elongate slot to form a boundary of said first element on one side of said slot and a boundary of said second element on the other side of said slot.

Brief Description of the Drawings

Examples of embodiments of the present invention will now be described with reference to the drawings in which:-

Figure 1 shows a block circuit diagram of an embodiment of the present invention;

Figure 2 shows an elevation view of a double spiral probe;

Figure 3 shows a side cross-sectional view of the probe shown in Figure 2;

Figure 4 shows a side cross-sectional view of a split tube protruding probe;

Figure 5 shows a side elevation view of the probe shown in Figure 4;

Figure 6 shows a side cross-sectional view of a double helix protruding probe; and

Figure 7 shows a side elevation view of the probe shown in Figure 6.

Description of the Preferred Embodiments

Referring to Figure 1, an apparatus, such as a

- 7 -

corrosion monitor 1, for monitoring changes in the resistance of an exposed element 101 generally comprises a probe device 3 comprising the exposed element 101 and a reference element 103, electronic
5 circuitry 5 and a cable 7 for connecting the electronic circuitry to the probe.

The exposed element and the reference element are electrically connected in series and connected to a current generator 11,15 which drives current through
10 the series circuit. The electronic circuitry further comprises voltage monitoring means 11,19 arranged to monitor the voltage developed across each of the exposed and reference elements. In a preferred embodiment, the electronic circuitry further includes
15 a multiplexer 17 for switching the voltage monitoring means to measure alternately the voltage across each element.

Figures 2 to 7 show the probe 5 with configurations of the probe elements. In Figures 2
20 and 3, a double spiral probe is shown and in Figures 4 to 7 protruding probes are shown. The elements of the probe are situated proximate to each other to help ensure that the temperature difference between the exposed element and reference element is minimal and
25 the reference element has good thermal contact with the environment, such as the fluid in the pipeline. Even if the environment temperature, of the pipeline fluid for example, is constant, the exposed and reference elements are unlikely to be at the same
30 temperature in the prior art configurations. As the exposed element is in contact with the pipeline fluid

- 8 -

and the reference element is not in contact with the pipeline fluid, the temperature of the reference element may be affected by the surrounding environment, i.e., the probe body and the electrical leads. Unlike the prior art, the insulating material protecting the reference element in the probe is as thin as possible and the space between reference element and exposed element is also minimised to help ensure that the reference element and exposed element are at substantially identical temperatures. In the prior art, the reference element is in poor thermal contact because the reference element is protected from the environment by at least a few millimetres of insulating material. To ensure that any inhomogeneity that may be present in the metal itself and resulting from the machining process, both elements may be machined from the same piece of metal such that a narrow slit defines the two elements. In this manner, any inhomogeneities in the metal (which could effect the temperature coefficient of resistivity of the metal) either inherent in the metal arising from machining or from subsequent annealing and the like, are shared by both the exposed element and the reference element and are common to both so that their effects are substantially cancelled. In this manner, the temperature coefficient of resistivities in both probe elements are as closely matched as possible. Matching the temperature coefficient of resistivities in each element as closely as possible is important because as discussed above the exact metallurgical characteristics of samples of steel may, even from the

- 9 -

same piece of metal, vary, for example in the range of 200ppm °C⁻¹ to 500ppm °C⁻¹. If the probe elements exhibit different temperature coefficient of resistivities, false indications of corrosion may result. To illustrate this, even if the temperature coefficient of resistivities for probe elements differ by 10ppm °C⁻¹, a change in temperature of 50 °C would change the resistance ratio of 500ppm. Therefore, unlike the prior art, not only are the probe elements machined from the same piece of material, the elements are defined by a narrow slit made in the material so that the elements exhibit temperature coefficient of resistivities as near to identical as possible. Additionally, since the temperature coefficient of resistivity of steel may cause an inaccurate reading of change in resistance ratio between the exposed element and the reference element, it is important that the temperature difference between the two elements is as small as possible. For example, a 0.05°C temperature difference could change the measured resistance by 20ppm which would result in spurious indications of corrosion and/or erosion.

In Figures 2 and 3, a flush double spiral probe 3 is shown for mounting flush with the wall of a pipe in a pipeline. The flush double spiral probe comprises a steel double spiral consisting of the exposed element 101 and the reference element 103 of the probe. The double spiral is preferably of a similar material as that of the material to be monitored, for example the metal material of a steel pipeline. The double spiral is formed from a metal disk with a thickness of, for

- 10 -

example, between 0.1mm to 6mm, although other thicknesses may also be used. The metal disk is divided along an elongate slot or slit to form the exposed and reference elements. The process by which the material is divided is preferably chosen so as to minimise any changes in the microstructure of the material both local to and remote from slot, and may for example include spark machining, wire corrosion, etching and the like. In this embodiment, two spiral narrow slits 135 and 137 are formed in the disk to define the exposed element and the reference element. The slits 135 and 137 are preferably narrow, for example in the range of 0.2 mm - 4mm, however the slits should be wide enough for the insulating material to flow and fill the gaps between the elements during manufacture of the probe. The first slit 135 defines the inner edge 139 of the reference element 105 and the outer edge 141 of the exposed element 101, and the second slit 137 defines the outer edge 143 of the reference element and the inner edge 145 of the exposed element. Advantageously, with this configuration the reference element is depicted as the outermost element and the exposed element is the innermost element to maximise the distance from the exposed element from the housing 115 to help prevent "bridging" caused by electrically conductive contaminants in the fluid that may lodge between the exposed element and the housing on the probe which may cause spurious values of exposed element resistance. Other arrangements of the elements instead of the circular spiral configuration may be configured such

- 11 -

as oval or rectangular and the like. In this configuration, the exposed element 101 is 60% shorter than the reference element 103. The widths of the two elements may be the same, as shown, although in other
5 embodiments, the widths of the elements may differ. Of course, the number of spirals shown may be increased or decreased accordingly. If the exposed element is too narrow, the resistance of the exposed element is more prone to the effects of pitting, i.e.,
10 localized corrosion, which may result in erroneous readings and shortens the life span of the probe. Additionally, to provide a better signal to noise ratio, the reference element preferably has a greater resistance than the initial resistance of the exposed
15 element prior to use of the probe. Preferably, the resistance of the reference element is about twice that of the exposed element prior to use. Conveniently, with this configuration, the probe should be replaced once the resistance of the exposed
20 element has increased, due to the loss of metal by corrosion and erosion by the fluid environment, to equal the resistance of the reference element. Prolonging the life of the probe beyond this point may result in inaccurate readings due to non uniform
25 corrosion and erosion which typically occurs in thinner elements as discussed above.

The double spiral is mounted in the probe housing
115 such that the front surface 151 of the reference element is recessed with respect to the plane of the front surface 149 of the exposed element. The front
30 surface 151 of the reference element may be recessed

- 12 -

by a number of ways, for example by either bending the double spiral at the mid-point joining spar 129 to recess the reference element portion of the double spiral or by physically removing material, by for
5 example spark machining, the front surface 151 of the reference element portion of the double spiral, which may be either before or after machining the slits in the disk. If material from the surface of the reference element is removed, then the back surface
10 155 of the reference element is in the same plane as the back surface 153 of the exposed element. Current leads and voltage leads are joined to the double spiral. Current lead 121 is connected to reference element end 159 and current lead 125 is connected to
15 exposed element end 157. Common voltage leads 117 and 119 are connected to and make separate electrical contact to the central spar region 129 of the double spiral, while reference element voltage lead 123 and exposed element voltage lead 127 are connected closely
20 with the current leads 121 and 125 to the reference element end 159 and exposed element end 157 of the double spiral, respectively.

The double spiral is mounted in the probe housing 115 with an insulating material, e.g. epoxy resin or
25 ceramic or the like, to bond the double spiral to a backplate 133. Conveniently, the backplate is preferably a metal with a high thermal conductivity such as copper and the like to improve thermal contact of the back surfaces 153 and 155 of the elements with
30 the pipeline fluid temperature. With this configuration, the difference in temperature between

- 13 -

the two elements resulting from the higher thermal impedance to the fluid experienced by the reference element because of the thin protective layer is partially compensated for by the backplate. A thin layer of insulating material, preferably in the range of 0.1mm to 1mm, is used to bond the probe elements to the back plate. Conveniently, if the reference element is recessed by bending, the back surface 155 of the reference material may be closer to the back plate. Such a configuration substantially minimises the thermal impedance between the reference element and back plate which helps compensate for the higher thermal impedance between the front surface 151 of the reference element and the pipeline fluid.

The insulating material is formed flush with the end 161 of the probe housing and the front surface 149 of the exposed element 101 to provide a thin protective layer 113 of insulating material over the front surface 151 of the reference element 103. Preferably, the protective layer is a 0.2mm layer of insulating material which is thinner than the protective layer in the prior art and therefore the thermal contact in which the reference element is in with the fluid environment is improved. The insulating layer covers the front surface 151 of the reference element 103, however any depth of insulating material may coat the reference element as long as the reference element remains in good thermal contact with the fluid environment.

In any embodiment of the probe, the thin protective covering, e.g. 113, may be a non-corrosive

- 14 -

metallic cover layer. The metallic cover layer may for example comprise gold, platinum, or chromium or any other relatively inert metal or other metal which does not corrode to any significant degree when
5 exposed to the fluid in question. Providing a non-corrosive metallic cover layer 113 over the reference element 103 provides the advantage of providing the reference element with good thermal contact with the pipeline fluid. Preferably, the metallic layer is
10 relatively thin such that it does not significantly modify the resistance of current path provided by the reference element as a whole.

In Figures 4 and 5, a split tube protruding probe is shown for mounting in a wall of a pipe and
15 protruding into the fluid environment in the pipeline. The split tube protruding probe comprises a split tube consisting of the exposed element 101 and the reference element 103. The split tube is of the same metallic material as that of the pipeline, e.g. steel,
20 and is machined from a metal rod. The rod is centrally drilled from one end 163 of the rod along the longitudinal axis of rod to 5mm to 10mm from the other end 165 of the rod to form a thin walled tube with a bridge 131 at one end 165. The thickness of
25 the tube walls is preferably in the range 0.1mm to 6mm. The tube may be spark machined to form the probe elements 101 and 103. Two slits (only one slit is shown, slit 167) are formed along the longitudinal axis of the tube section up to the bridge 131 to
30 define the exposed element 101 and the reference element 103. The slits may be as narrow as discussed

- 15 -

above, however, for this embodiment the slits may be wider than for other embodiments. The narrow slits define the edges (only edges 169 and 171 are shown) of each probe element.

5 The split tube is mounted to a steel flange 173 with a suitable seal such as epoxy resin or ceramic or the like. A coaxial metal rod 175 is joined, for example by welding, to the bridge and extending in the tube just beyond the end 163 of the tube. The coaxial
10 metal rod may share the same purposes as the back plate as discussed above in the flush double spiral probe embodiment. For example, the coaxial metal rod is preferably a metal of high thermal conductivity such as copper and the like to improve thermal contact
15 of the back surfaces of the probe elements with the pipeline fluid and help maintain the two elements at near identical temperature as possible. The coaxial metal rod 175 also strengthens the structural integrity of the split tube protruding probe. Current
20 lead 121 is connected to reference element end 181 and current lead 125 is connected to exposed element end 179. Common voltage leads 117 and 119 are connected to end 177 of coaxial metal rod 175, while voltage leads 123 and 127 are connected closely with the
25 current leads 121 and 125 to the reference element end 181 and the exposed element end 179, respectively.

 The split tube is filled with a suitable insulating material, e.g. epoxy resin or ceramic or the like, to protect the inner surfaces 183 and 185 of
30 the probe elements from the fluid environment in the pipeline. To protect the reference element 103, the

- 16 -

outer surface 189 of the reference element and reference element portion of the bridge 191 is thinly covered by preferably 0.2mm layer of insulating material as discussed above in the flush double spiral probe embodiment. The outer surface 187 of the
5 exposed element and the exposed element portion of the bridge are left uncovered.

In Figures 6 and 7, a double helix protruding probe is shown which is similar to the split tube
10 protruding probe discussed above. The double helix protruding probe comprises the tube as machined above for the split tube protruding probe, but the exposed element 101 and the reference element 103 are each helical strips defined by two helical narrow slits 195
15 and 197 formed along the longitudinal axis of the tube. The two helical narrow slits are machined into the tube to form the probe elements. For this embodiment, the slits may be as narrow as discussed above however preferably the slits are 1mm. The first
20 slit 195 defines the lower edge 199 of the exposed element 101 and the upper edge 201 of the reference element, while the second slit 197 defines the upper edge 203 of the exposed element and the lower edge 205 of the reference element.

25 As with the split tube protruding probe, the elements are mounted to a steel flange 173 with a suitable seal such as epoxy resin or ceramic or the like. A coaxial metal rod 175 serve the similar purposes of the back plate as discussed above in the
30 flush double spiral probe embodiment and the coaxial metal rod as discussed in the split tube protruding

- 17 -

probe embodiment. The coaxial metal rod may also be preferably a metal of high thermal conductivity such as copper and the like to improve thermal contact of the back surfaces of the probe elements with the pipeline fluid and help maintain the two elements at near identical temperature as possible. The coaxial metal rod is also joined to the bridge and extends in the tube just beyond the end 163 of the tube which also strengthens the structural integrity of the double helix protruding probe. Current lead 121 is connected to reference element end 181 and current lead 125 is connected to exposed element end 179. Common voltage leads 117 and 119 are connected to end 177 of coaxial metal rod 175, while voltage leads 123 and 127 are connected closely with current leads 121 and 125 to the reference element end 181 and the exposed element 179, respectively. The split tube is also filled with a suitable insulating material, e.g. epoxy resin or ceramic or the like, to protect the inner surfaces 207 and 209 of the probe elements. To protect the reference element 103, the outer surface 211 of the reference element and reference element portion 213 of the bridge is thinly covered by the insulating material by preferably a 0.2mm layer as discussed above in the flush double spiral probe embodiment. The outer surface 217 of the exposed element and the exposed element portion 215 of the bridge are left uncovered.

The double helix protruding probe, like the split tube protruding probe, compensates for any axial variations in the temperature coefficient of

- 18 -

resistivity of the tube. The double helix protruding probe also compensates for any circumferential variations in the temperature coefficient of resistivity of the tube. Additionally, in the double helix protruding probe having a tube of the same length and wall thickness, the resistance of the elements is higher than the resistance of the elements in the split tube protruding probe. As discussed above, increasing the resistance of the exposed element increases the sensitivity of the probe by improving resolution of the measurements to the changes in resistance of the exposed element due to corrosion and/or erosion by the fluid pipeline. For example, for a 10mm diameter probe with slits machined to form 3mm wide probe elements, the resistance of the double helix protruding probe is approximately 28 times higher than the resistance of the split tube protruding probe. Similarly, for 5mm wide elements, the resistance for the helix protruding probe is approximately 10 times higher than that of the split tube protruding probe.

Advantageously, in any of the embodiments, the corrosion monitor may be configured to monitor temperature of the probe. A third resistive element, a calibration resistor 105, may be included in the electronic circuitry 5 as shown in Figure 1. Such a calibration resistor provides for monitoring the temperature of the probe, and hence the temperature of the pipeline fluid, without the need for special temperature sensors as in conventional corrosion probes. In Figure 1, the calibration resistor 105 may

- 19 -

be included in the electronic circuitry 5 in series with the exposed element 101 and the reference element 103. In a preferred embodiment a switch, such as multiplexer 17, may connect separate voltage terminals for each of the exposed element 101, reference element 103, and calibration resistor 105 to the voltage monitoring means 11, 19.

The calibration resistor 105 allows the accurate measurement of the reference element temperature without the need for additional temperature sensors. The absolute resistance of the reference element 103 is determined with the equation $R_r = (V_r/V_c)R_c$, where R_r is the resistance of the reference element, V_r is the voltage across the reference element, V_c is the voltage across the calibration resistor and R_c is the resistance of the calibration resistor. Since the relationship between resistance and temperature is near linear, simply a linear interpolation between calibration points is adequate, however, the calibration procedure of the probe may involve a look-up table comprising values of R_r recorded at various known temperatures during a calibration procedure to determine the real-time temperature for resistance R_r . This provides an accurate value for the temperature of the reference element and provides an indication of the temperature of the pipeline fluid. Such a look up table may be stored in a memory (not shown) in the electronic circuitry 5.

The calibration resistor is preferably highly stable and insensitive to temperature fluctuations with a resistance which is preferably similar to that

- 20 -

of the probe elements. The calibration resistor preferably also has a low temperature coefficient of resistance (e.g. $\pm 10\text{ppm } ^\circ\text{C}^{-1}$) and a low inductance. Alternatively, if a resistor having the above

5 coefficient of resistance is not available the error may be corrected by measuring the temperature of the calibration resistor directly in the electronic circuitry and determining its actual resistance from its known temperature coefficient of resistance. The

10 use of a metallic, non-corrosive cover layer on the reference element, is particularly advantageous when measuring temperature, since the metallic layer would generally have a high thermal conductivity and could be relatively thin so that the temperature of the

15 reference element closely follows the temperature of the fluid.

Conveniently, in any of the embodiments, the corrosion monitor may be configured to monitor the electrical conductivity of the pipeline fluid. In the

20 corrosion monitor, a voltage V_A , which is monitored in the corrosion probe 3, is developed across the exposed element 101 when the current generator 11,15 drives a current through the exposed element 101. If the pipeline fluid is conducting, for example a pipeline

25 fluid such as oil may contain traces of water, a leakage current I_L may flow from the exposed element 101 through the conductive fluid, e.g. water, to the body of the probe 115. This may occur for example in the flush double spiral probe 3 shown in Figures 2 and

30 3 where the distance between the outer limb of the exposed element 101 and the probe body 115 may be

- 21 -

relatively small.

In Figure 1, a pipeline fluid conductivity measurement resistor 107 is provided. In the probe, the point where probe elements 101,103 are connected is not electrically connected directly to the probe body 115. Instead, the conductivity measurement resistor 107 is electrically connected where the probe elements 101, 103 are electrically connected, e.g. the central spar region 129 of the double spiral in Figure 2, and to ground. The conductivity measurement resistor 107 preferably has a finite resistance R_M , for example $10k\Omega$ to $1M\Omega$, and is connected to ground. The leakage current I_L flowing through the conductivity measurement resistor 107 develops a voltage $I_L R_M$ which is measured by voltage monitoring means 11,19. In a preferred embodiment a switch, such as multiplexer 17, may connect the voltage terminals for the conductivity measurement resistor 107 to the voltage monitoring means 11,19.

The conductivity measurement resistor 107 allows the accurate measurement of electrical conductivity of the pipeline fluid. The leakage current flows from the outside turn of the exposed element 101 spiral to the probe body. The average voltage developed along the outside turn is a fraction f of the voltage V_A produced by the current driven by the current generator 11,15 through the exposed element 101. The values of this fraction may depend on several factors including the geometry of the exposed element 101 and is generally in the range of 0.1 to 0.5.

The conductivity of the pipeline fluid is

- 22 -

determined by the equivalent resistance of the pipeline fluid, i.e. the resistance of the fluid from the outer limb of the exposed element 101 to the probe body 115. The conductivity of the pipeline fluid may
5 be determined from the resistance of the pipeline fluid with calibration in fluids of known electrical conductivity. Thus, the equivalent resistance of the pipeline fluid is determined with the equation $R_L = R_M(1 + fV_A/V_M)$, where $V_M/R_M = fV_A/(R_M + R_L)$, since
10 $I_L = fV_A/(R_M + R_L)$ and $V_M = I_L R_M$, and where R_L 106 represents the equivalent resistance of the pipeline fluid and is represented in Figure 1.

In this configuration, the conductivity of the pipeline fluid may be monitored in real-time. This is
15 useful for determining for example the water content of a pipeline fluid such as oil. Thus, the higher the water content the higher the conductivity of the pipeline fluid. Monitoring the conductivity of the pipeline fluid is also useful for monitoring the
20 addition of corrosive inhibitors to the pipeline fluid. The conductivity of the pipeline fluid may provide a measure of the corrosiveness of the fluid and could be used as part an advance warning system in predicting pipeline corrosion so that appropriate
25 preventative action can be taken.

Further modifications to the embodiments described herein will be apparent to those skilled in the art.

- 23 -

CLAIMS

1. A probe device for use in an apparatus for monitoring changes in the resistance of an element caused by a fluid at the surface thereof, said probe device comprising a first element having a surface that is directly accessible by a fluid, a second element electrically connected in series with said first element and forming therewith a path for the passage of electrical current to flow therethrough, wherein said first element and said second element are formed from the same piece of material, said piece of material being divided along an elongate slot to form a boundary of said first element on one side of said slot and a boundary of said second element on the other side of said slot.
2. A probe device as claimed in Claim 1, wherein each of said first and second elements are formed as strips from said piece of material.
3. A probe device as claimed in Claim 1 or 2, wherein the locus of said slot extends about an axis.
4. A probe device as claimed in any preceding claim, wherein said first and second elements are defined by first and second spiral slots formed in said piece of material such that each slot defines both an edge of said first element on one side thereof and an edge of said second element on the other side thereof.

- 24 -

5. A probe device as claimed in Claim 4, wherein said first and second elements are electrically connected at a position at or near the centre of their respective spirals.

5

6. A probe device as claimed in any preceding claim, further comprising a layer of material over said second element for preventing contact between a fluid and said second element.

10

7. A probe device as claimed Claim 6, further comprising a metal member disposed adjacent the surface of said second element which, in use, faces away from said fluid, to increase the thermal coupling between said fluid and said second element.

15

8. A probe device as claimed in Claim 7, comprising a layer of material over said second element for preventing contact between fluid and said second element and wherein said metal member is closer to said second element than to said first element.

20

9. A probe device as claimed in Claim 1, wherein said piece of material comprises an elongate member and said first and said second elements are defined by said slot extending longitudinally in said member.

25

10. A probe device as claimed in Claim 9, wherein said member comprises a tubular member and said first and second elements are defined by first and second slots extending linearly and substantially parallel to

30

- 25 -

the longitudinal axis of said tubular member.

11. A probe device as claimed in Claim 9 or 10,
arranged in a flow of fluid, wherein said second
5 element has a surface that is accessible by said
fluid, said slot or slots being arranged such that the
surface of said first element that is accessible by
said fluid is directed into the flow of fluid and the
surface of said second element that is accessible by
10 said fluid is directed substantially away from said
flow.

12. A probe device as claimed in Claim 9, wherein
said member comprises a tubular member and said first
15 and said second elements are defined by first and
second helical slots extending around the longitudinal
axis of said tubular member.

13. A probe device as claimed in any one of Claims 10
20 to 13, further comprising a layer of material over
said second element for preventing contact between a
fluid and said second element.

14. A probe device as claimed in any one of Claims 9
25 to 13, wherein said first element is electrically
connected to said second element at a point adjacent
one end of said elongate member.

15. A probe device as claimed in any one of Claims 10
30 to 14, further including a metal member mounted within
and extending along said tubular member.

- 26 -

16. A probe device as claimed in Claim 15, wherein said metal member is electrically connected to both said first and second elements at a point adjacent or at the end of said tubular member.

5

17. A probe device claimed in Claim 16, wherein said metal member is disposed adjacent said element to increase the thermal coupling between said fluid and said second element.

10

18. A probe device as claimed in any preceding claim, wherein said second element has an electrical resistance that is greater than that of said first element along said path.

15

19. A probe device as claimed in any preceding claim in combination with an apparatus for monitoring changes in the resistance of said first element caused by a fluid at the surface thereof, said apparatus comprising driving means for generating a current and driving said current through said first and second elements and monitoring means arranged to monitor the respective voltages across said first and second elements.

25


20. An apparatus for monitoring changes in the resistance of an element caused by a fluid at the surface thereof, comprising a probe device comprising a first element having a surface that is directly accessible by a fluid, a second element electrically connected in series with said first element and

30



- 27 -

arranged for thermal coupling with said fluid, said apparatus comprising a third element in series with said first element and said second element, said apparatus further comprising means for passing a
5 current through the first element, second element, and the third element, and means for monitoring the respective voltages across each of said elements.

21. An apparatus for monitoring the conductivity of a
10 fluid comprising a first element having a surface that is directly accessible by a fluid, a second element electrically connected in series with said fluid, said apparatus comprising a third element electrically
connected from between said first and second elements
15 to ground, the apparatus further comprising means for passing a current through said first element and said second element, and means for monitoring the respective voltages across said first and third elements.

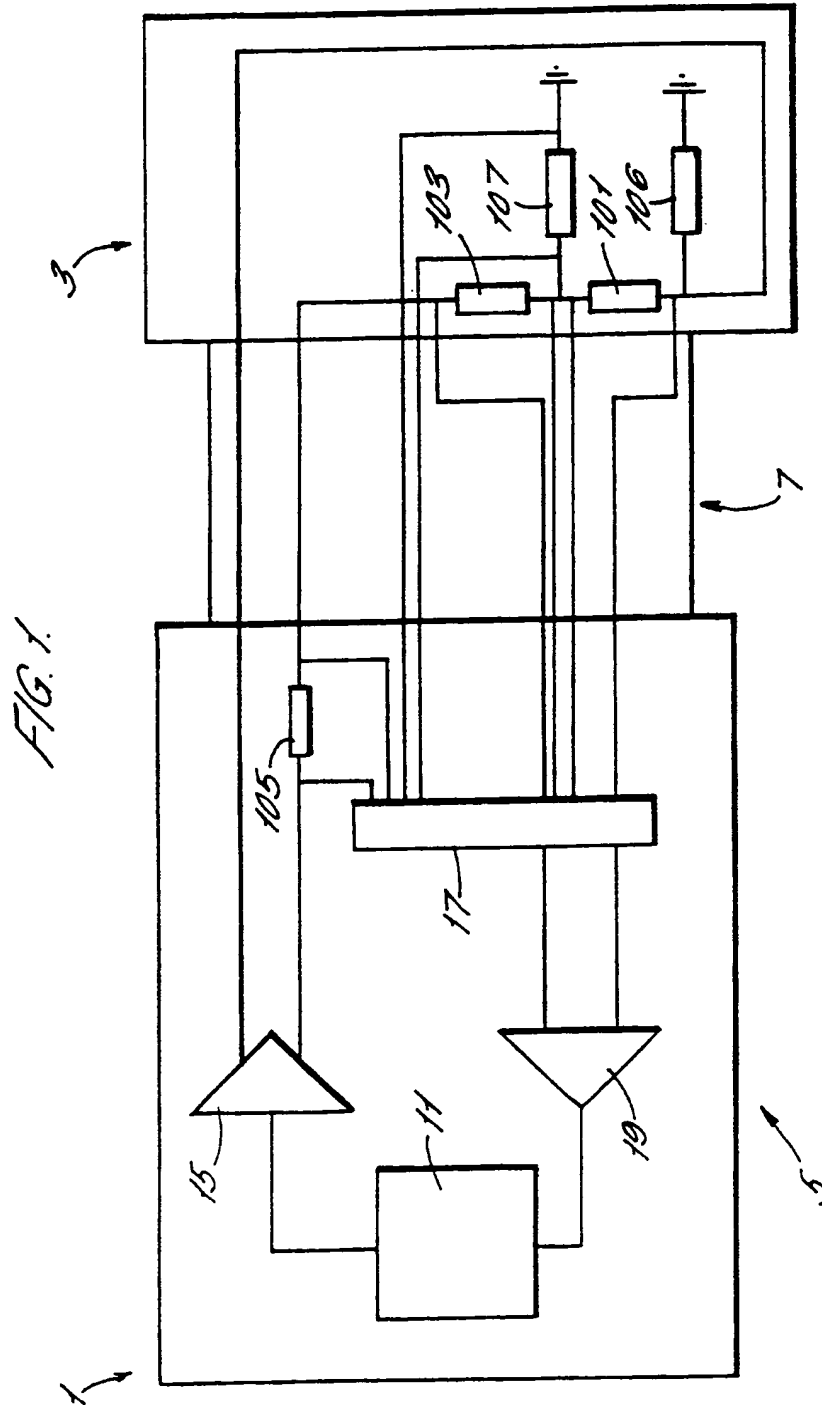

2/4

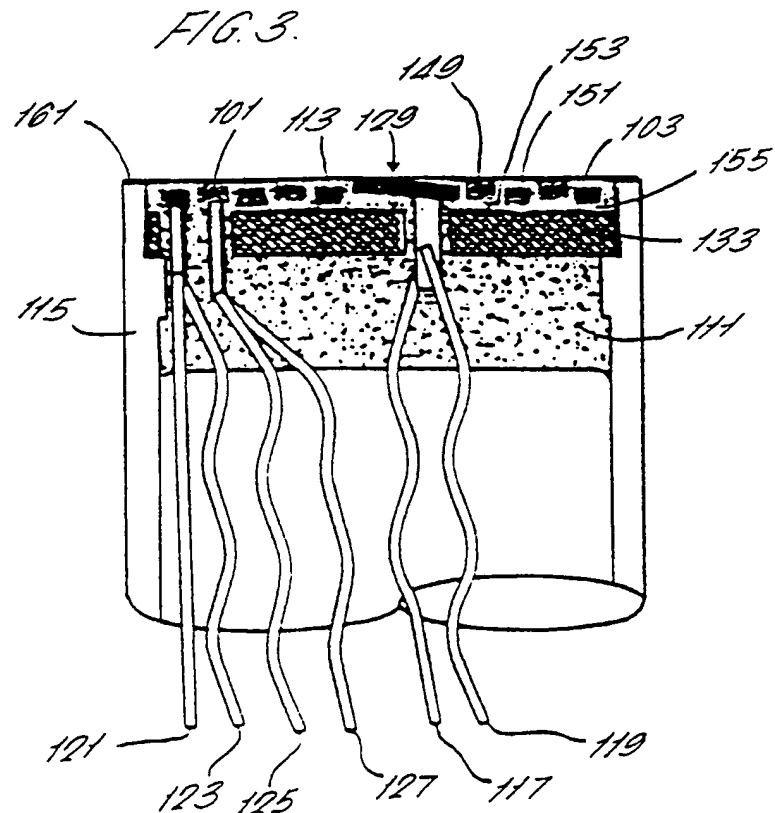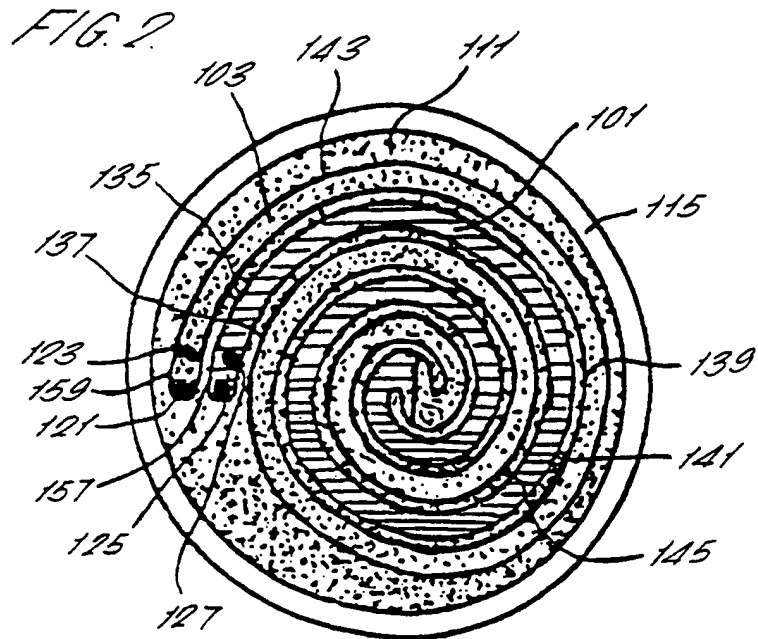

3/4

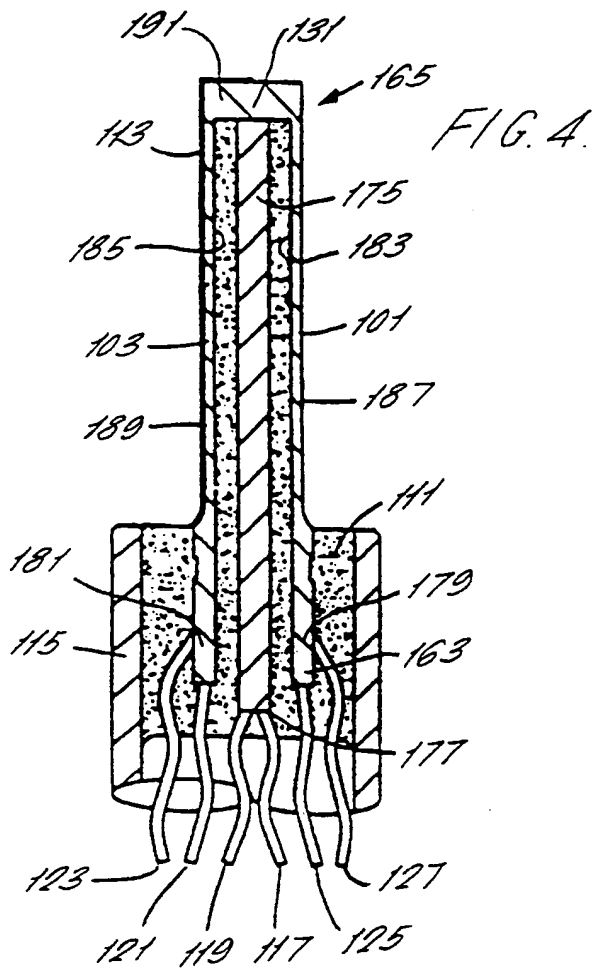
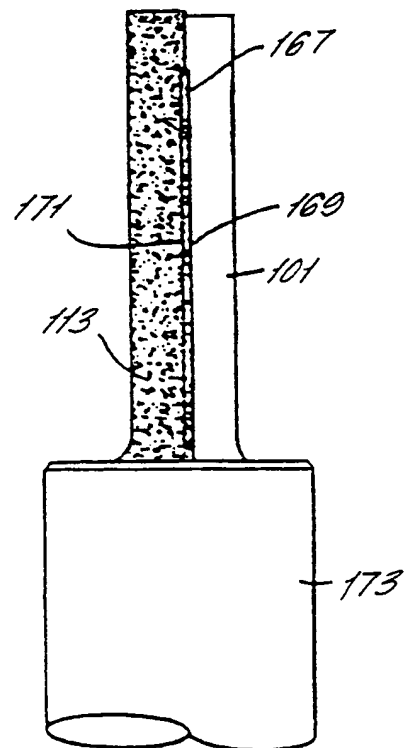


FIG. 5.




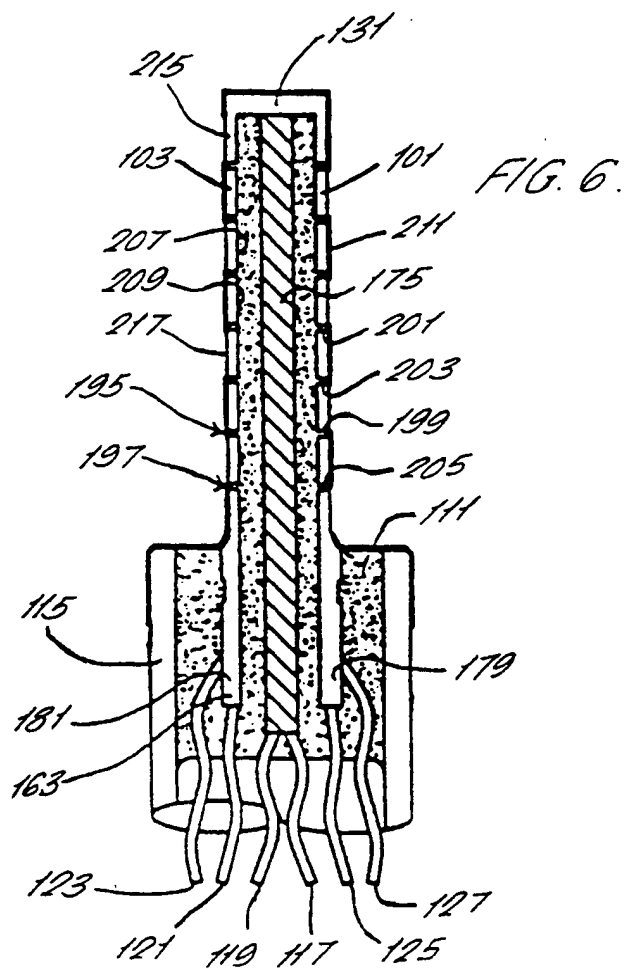


FIG. 7.

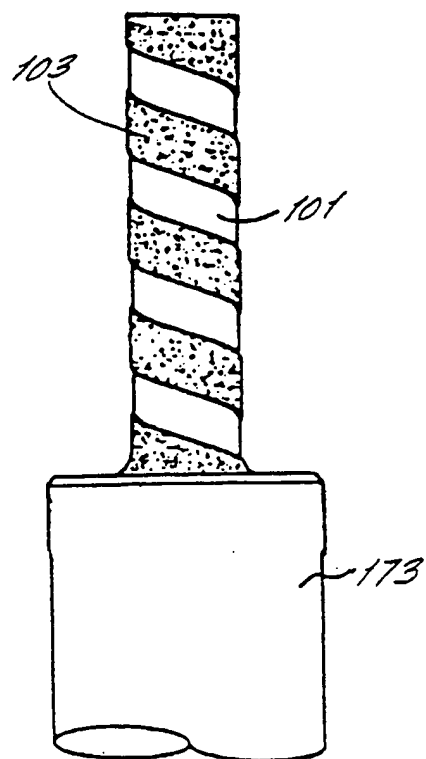

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/00828

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 124 771 A (G. H. ROHRBACK) 10 March 1964 (1964-03-10) column 3, line 17 - line 54; figures 1-3 ---	1,20,21
Y	"CORROSION-INDICATING DEVICE" IBM TECHNICAL DISCLOSURE BULLETIN, US, IBM CORP. NEW YORK, vol. 32, no. 10A, 1 March 1990 (1990-03-01), page 25 XP000083247 ISSN: 0018-8689 the whole document ---	1,20,21
A	US 5 332 961 A (HAMMERLE ROBERT H) 26 July 1994 (1994-07-26) column 4, line 10 - line 42; figure 1 --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

27 June 2000

Date of mailing of the international search report

05/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Duchatellier, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/00828

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB 2 262 608 A (ROWAN TECHNOLOGIES LTD)</p> <p>23 June 1993 (1993-06-23)</p> <p>figure 1</p> <p>-----</p>	1

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/GB 00/00828

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3124771 A	10-03-1964	NONE	
US 5332961 A	26-07-1994	CA 1310510 A	24-11-1992
GB 2262608 A	23-06-1993	NONE	